

Sequence Wall Panels




- » Excellent acoustic absorption
- » White painted, RAL coloured or fabric finishes available
- » Simple framing system
- » Durable mineral wool core
- » Lightweight, easy to handle panels
- » Good humidity resistance

SOFT FIBRE

+44 (0)1455 618 787
enquiries@burgesscep.com
Brookfield Road, Hinckley LE10 2LL
Verulam Road, Stafford ST16 3EA
WWW.BURGESSCEP.COM


Sequence Wall Panels

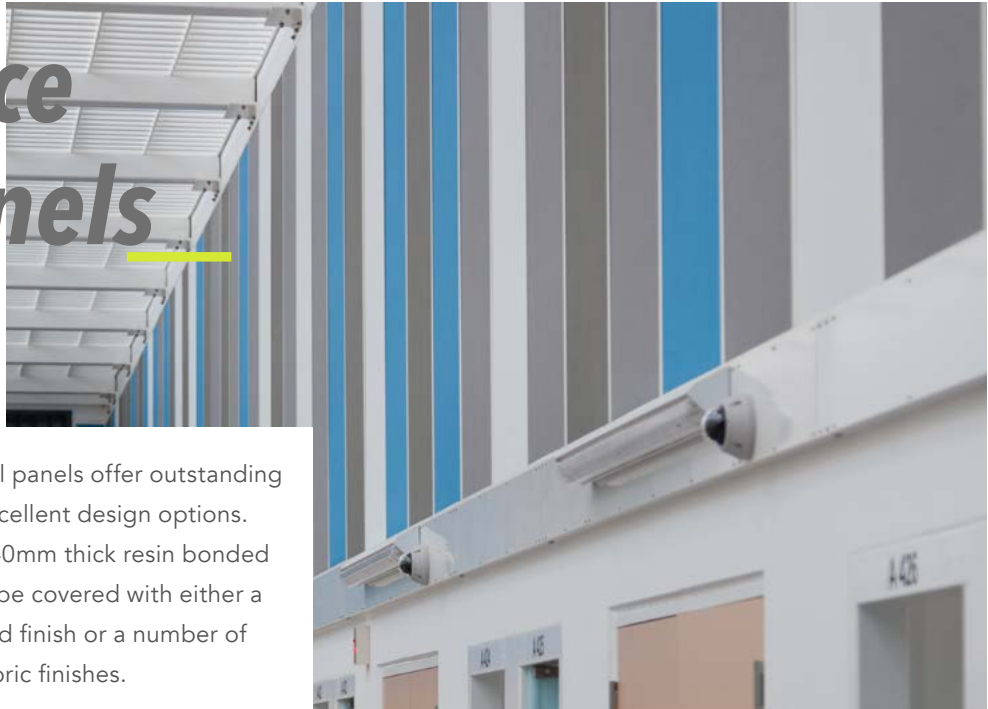

The Sequence range of wall panels offer outstanding acoustic absorption and excellent design options. The panel themselves are 40mm thick resin bonded mineral wool and they can be covered with either a contemporary white painted finish or a number of different durable colour fabric finishes.

The panels slot into either a steel or aluminium framing system, in either a black or white polyester powder coated finish. Panels can be cut and shaped to suit almost any design, offering unlimited aesthetic options.

SEQUENCE



Grid Panel

2700 x600 x 40mm

cartons of 5 panels

G2000-WG-05

Non-standard sizing also available, please contact our technical team for details.

Available in white as standard, with the option to match any RAL colour, as well as a selection of fabric faced or fabric wrapped panels.



SOUND ABSORPTION

Class A in accordance with EN ISO 11654. α_w : 1.00 in accordance with EN ISO 11654. Noise Reduction Coefficient (NRC): 0.90 in accordance with ASTM C 423-01.



PRODUCT WEIGHT

These wall panels weigh approximately 2kg per m².



ACCESSIBILITY

These wall panels are easily demounted.



TILE LOADING

These wall panels are not designed to support the weight of any services. Please contact us for grid loading data.



FIRE PERFORMANCE

Painted panels are rated as Euroclass A2-s1, d0 in accordance with EN 13501-1



HUMIDITY RESISTANCE

Suitable in conditions up to 95% relative humidity at 30°C.